


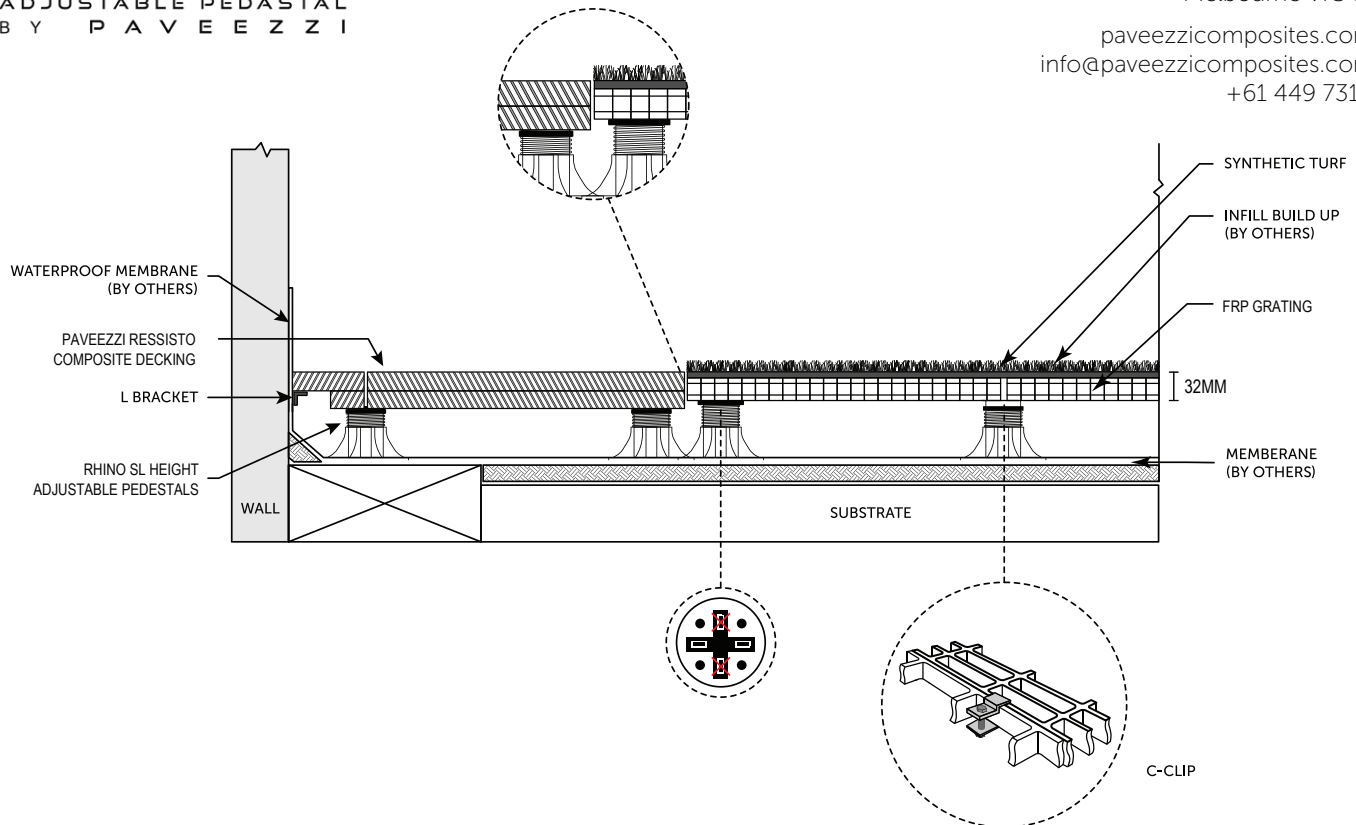


SECTION VIEW

ATTACH SYNTHETIC TURF TO FRP MINIMESH OR MIDIMESH GRATING, ELEVATED AND LEVELED ON SLOPED SURFACES USING ADJUSTABLE HEIGHT PEDESTALS TO CREATE LAWN AREAS ON BALCONIES, ROOFTOP DECKS AND TERRACES.

NOTES:

1. PERIMETER CONTAINMENT IS RECOMMENDED TO PREVENT LATERAL SHIFTING.
2. POSITION FRP GRATING ON INDEPENDENT/DEDICATED ROWS OF PEDESTALS WITH GRATING SURFACE / BELOW PAVER SURFACE.
3. CUT PEDESTAL BASE ON SCORE LINE TO POSITION PEDESTAL CLOSE TO PERIMETER.
4. MAXIMUM PEDESTAL SUPPORT SPACING ALONG GRATE PERIMETER AND UNDER BODY OF GRATE IS 600MM ON CENTER.
5. ONLY KEEP PEDESTAL HEAD SPACER TABS THAT ARE NECESSARY FOR HOLDING GRATES IN POSITION.
6. ATTACH TURF PER TURF MANUFACTURER RECOMMENDATIONS.
7. FOR PRODUCT INFORMATION VISIT WWW.PAVEEZZICOMPOSITES.COM.AU
8. DO NOT SCALE DRAWING.



ELEVATED SYNTHETIC TURF TO COMPOSITE DECKING

INSTALLATION OVER FRP GRATING AND HEIGHT-ADJUSTABLE PEDESTALS